

John Deere 350D, 400D Articulated Dump Truck (SN. 608490-626762) Diagnostic Service Manual (TM1198)

6205 and 6505
Tractors
Operation and Tests



For complete information, also see:

- 6205 and 6505 Repair
- Front Wheel Drive Axle
- POWERTECH® Engines
- Alternators and Starting Motors

CTM77

PDF  **DOWNLOAD** 

John Deere Werke Mannheim
TM4608 (29DEC00)
European Version
Printed in Germany
ENGLISCH

Covers: 350D,608490-626762),400D,608490-626762)

Type: Service Manual

Language: English

Pages: 780

Format: PDF

Features: Bookmarked, searchable, printable

Compatibility: Windows/Mac/Tablet/Mobile

This service manual contains important information for the maintenance, troubleshooting and servicing of the **John Deere 350D, 400D Articulated Dump Truck (SN. 608490-626762) Diagnostic Service Manual (TM1198)**

In this manual you will find detailed specifications, illustrations, schematics, diagrams and step-by-step procedures to properly service and diagnose the machine to the manufacturer's standards.



Contents:

- General Information
- Specifications
- Serial Number Location
- Engine Specifications
- Engine Diagnostics
- Engine Tests and Adjustments
- Engine Repair
- Power Train
- Transmission
- Axles
- Differential
- PTO
- Hydraulic System
- Electrical System
- Electrical Tests and Diagnostics
- Wiring Diagram / Schematic
- Ignition and Charging
- Steering
- Brakes
- Wheels
- Operator's Platform
- Body Panels
- Disassembly and Assembly
- Diagnostics, Tests and Adjustments
- Troubleshooting
- and much more...

Please note this manual is in **downloadable PDF format only**. If you have any questions about this product or would like to request sample pages, please contact us and reference the product name or SKU.

ADJUSTING NEUTRAL START SWITCH

1. Install holding tool (C) for shifter shaft detent (self manufactured).
2. Place shifter shafts in neutral position.
3. Adjust guide (A) by means of threaded pins (B) until pin tip is pointing to the center of the raised area between the recesses on shifter shaft (see arrow).

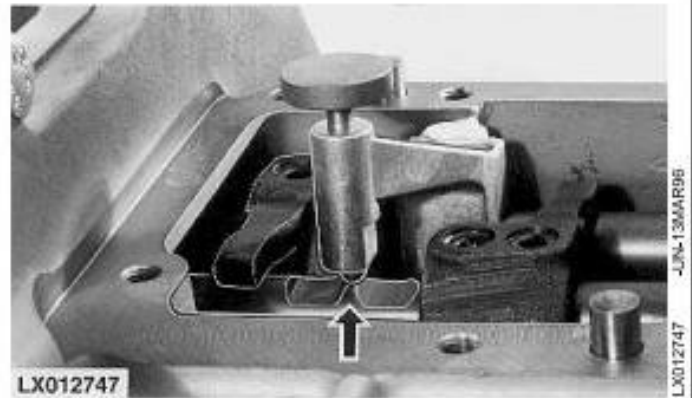
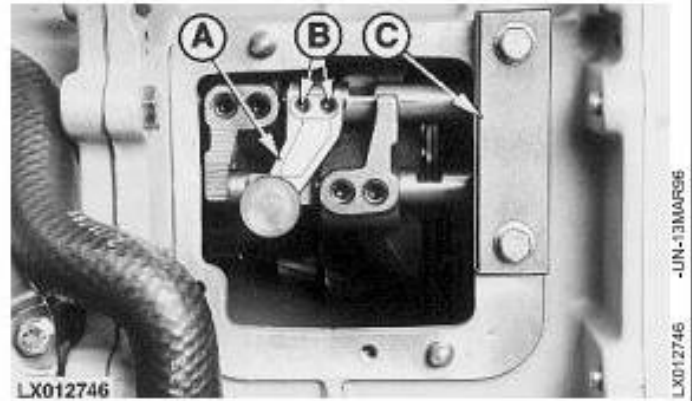


LX.RDTF 003906-19-01NOV95

4. Attach shift cover and insert adjusting tool RE37996 (A) into bore for neutral start switch. Push pin of tool completely downward.
5. Remove adjusting tool. Use thickest shim (B) fitting into adjusting tool gap.

Thickness of shims available

1.20 mm (0.047 in.)	2.00 mm (0.079 in.)
1.40 mm (0.055 in.)	2.20 mm (0.087 in.)
1.60 mm (0.063 in.)	2.40 mm (0.094 in.)
1.80 mm (0.071 in.)	

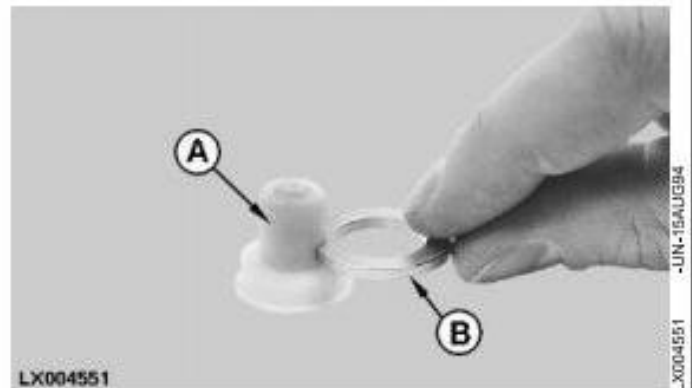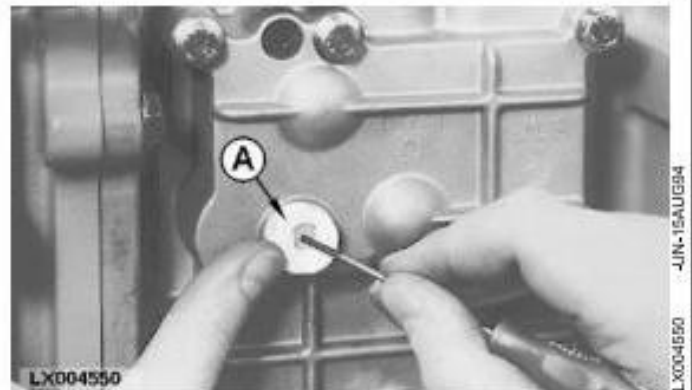

LX.25015 003822-19-01FEB97



Thank you very much
for your reading.
Please click here
to get more information.