

John Deere HPX615E Gator Utility Vehicle (SN. 010001-) Technical Manual (TM150919)

6110M, 6120M, 6125M,
6130M, 6135M, 6140M,
6145M Tractors Repair
(MY18, MY19)



JOHN HARE



COLLECTION

REPAIR TECHNICAL MANUAL

6110M, 6120M, 6125M, 6130M, 6135M, 6140M, 6145M
Tractors (MY18, MY19)

TM410719 01DEC18 (ENGLISH)



John Deere GmbH & Co. KG
John Deere Werk Mannheim

Covers: 010001);,HPX615E

Type: Service Manual

Language: English

Pages: 361

Format: PDF

Features: Bookmarked, searchable, printable

Compatibility: Windows/Mac/Tablet/Mobile

This service manual contains important information for the maintenance, troubleshooting and servicing of the **John Deere HPX615E Gator Utility Vehicle (SN. 010001-) Technical Manual (TM150919)**

In this manual you will find detailed specifications, illustrations, schematics, diagrams and step-by-step procedures to properly service and diagnose the machine to the manufacturer's standards.

Contents:

- General Information
- Specifications
- Serial Number Location
- Engine Specifications
- Engine Diagnostics
- Engine Tests and Adjustments
- Engine Repair
- Power Train
- Transmission
- Axles
- Differential
- PTO
- Hydraulic System
- Electrical System
- Electrical Tests and Diagnostics
- Wiring Diagram / Schematic
- Ignition and Charging
- Steering
- Brakes
- Wheels
- Operator's Platform
- Body Panels
- Disassembly and Assembly
- Diagnostics, Tests and Adjustments
- Troubleshooting
- and much more...

Please note this manual is in **downloadable PDF format only**. If you have any questions about this product or would like to request sample pages, please contact us and reference the product name or SKU.

- Tighten cap screw (C) to specification.

Item	Measurement	Specification
Upper Roll Yoke-to-Roll Cap Screw	Torque	340 N·m (250 lb-ft)

- Adjust roll timing. (See procedure in Section 50, Group 20.)

Remove and Install Lower Roll Driveline (Roll Conditioner)

[1] -



LEGEND:

A Door

994 Side Left Door

Open left-hand door (A) on platform to access roll conditioner driveline.

[2] -




LEGEND:

A Round-Head Bolt (3 used)
B Cap Screw
C Shield

Remove Driveline Shield

Remove three round-head bolts (A), cap screw (B), and shield (C).

[3] -

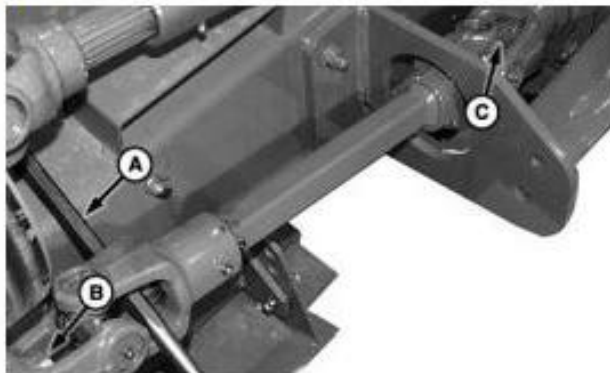

LEGEND:

A Pry Bar
B Cap Screw and Washer
C Cap Screw and Washer

Remove Lower Driveline

Wedge a pry bar (A) in yoke (as shown) to lock up driveline.

[4] - Loosen cap screws (B and C).

[5] - Remove cap screws and washers (B and C), pry bar (A), and driveline assembly.



Thank you very much
for your reading.
Please click here
to get more information.