




Bobcat®

Operation & Maintenance Manual Mid-Mount Finish Mower

(Mower Mid MM54) S/N AB4D00101 & Above
(Mower Mid MM66) S/N AB4C00101 & Above

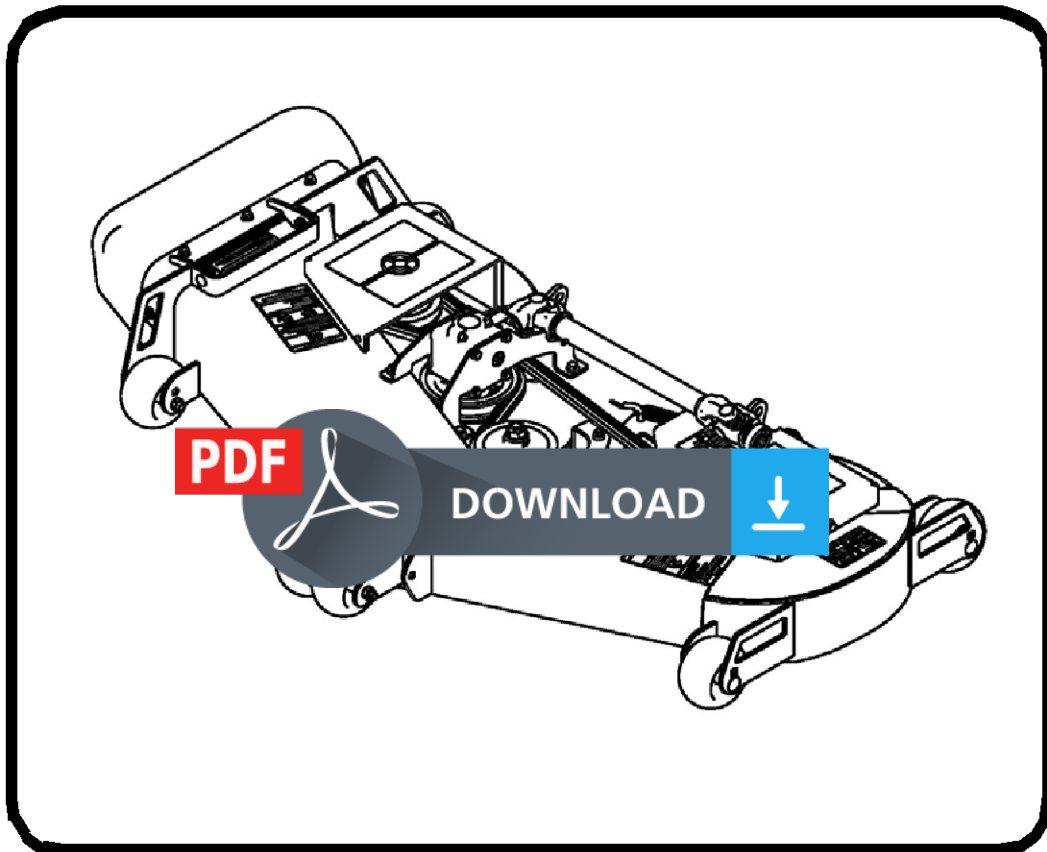

OPERATOR SAFETY WARNINGS




WARNING

Operator must have instructions before operating the machine. Untrained operators can cause injury or death.


W-2001-0502




Safety Alert Symbol: This symbol with a warning statement, means: "Warning, be alert! Your safety is involved!" Carefully read the message that follows.

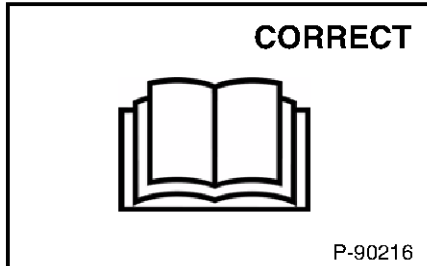


- ⚠ Never use the mid-mount finish mower without instructions. See machine signs (decals), Operation & Maintenance Manual, and Operator's Handbook.

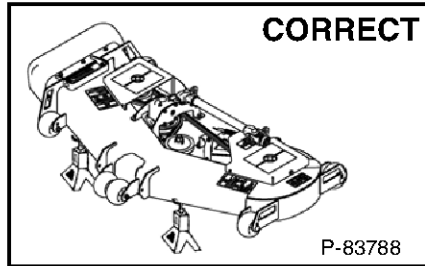


- ⚠ Securely block up the attachment before working underneath.

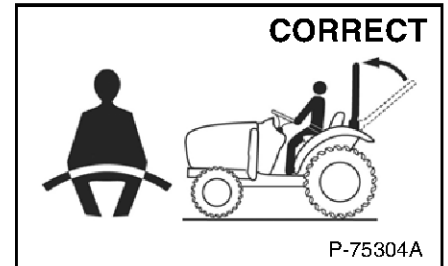


- ⚠ Fasten seat belt securely when Roll-Over Protective Structure (ROPS) is up and locked.
- ⚠ DO NOT wear seat belt if ROPS is down.

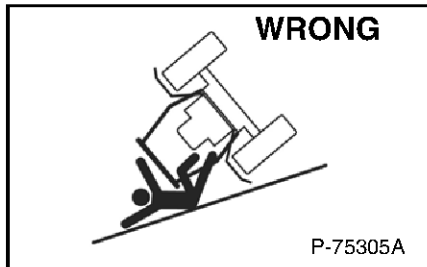

- ⚠ USE ROPS AND FASTEN SEAT BELT.
- ⚠ Always check work area before operating mid-mount finish mower.

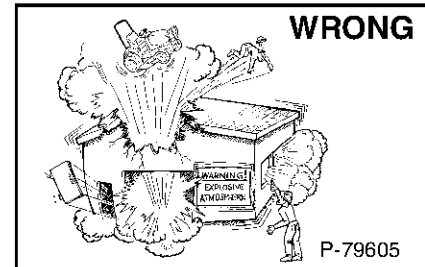


- ⚠ Do not use compact tractor or mid-mount finish mower in atmosphere with explosive dust, explosive gas, or where exhaust can contact flammable material.

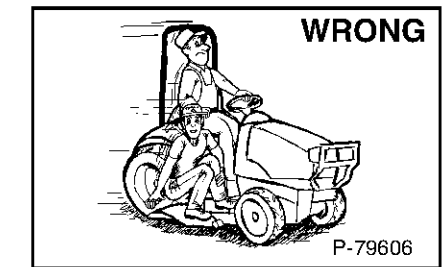


- ⚠ Never allow riders on the mid-mount finish mower.
- ⚠ Keep bystanders away when operating mid-mount finish mower.



- ⚠ Keep all guards and shields in place. Replace if missing or damaged.
- ⚠ Keep away from moving parts.
- ⚠ Only operate from the operator's position.

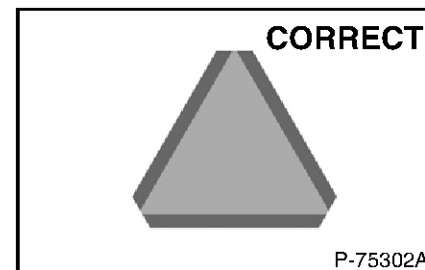

- ⚠ Obey all traffic regulations when on public roads. Use slow moving vehicle (SMV) emblem and hazard flashers when required.
- ⚠ Lock brake pedals together for road travel.

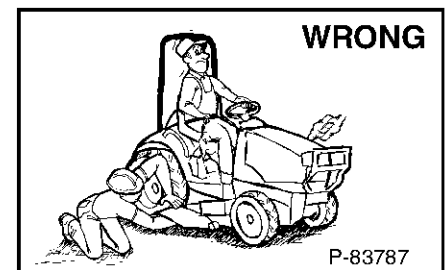

- ⚠ Do not put hands, feet, or objects under mid-mount finish mower when engine is running.
- ⚠ To park, engage PARKING BRAKE, put all controls in NEUTRAL, move PTO controls to OFF, put attachment flat on the ground and stop engine.

SAFETY EQUIPMENT

The Compact Tractor and Mid-Mount Finish Mower Attachment must be equipped with safety items necessary for each job. Ask your dealer about attachments and accessories.

1. SEAT BELT: Check belt fasteners and check for damaged webbing or buckle.
2. OPERATOR CAB (ROPS): It must be on the compact tractor with all fasteners tight.
3. MACHINE AND ATTACHMENT SAFETY SIGNS (DECALS): Replace if damaged.
4. OPERATOR'S HANDBOOK: Must be on the machine.
5. SAFETY INTERLOCK SYSTEM: Check function.
6. GRAB HANDLES: Replace if damaged.
7. PARKING BRAKE.
8. FINISH MOWER SIDE DISCHARGE DEFLECTOR: Replace if damaged.
9. FINISH MOWER BELT / PULLEY SHIELDS: Replace if damaged.
10. SAFETY TREADS: Replace if damaged.

OSW55-1012



Bobcat®

CONTENTS

| | |
|-------------------------------------|----|
| FOREWORD | 5 |
| SAFETY AND TRAINING RESOURCES | 13 |
| OPERATING INSTRUCTIONS | 21 |
| PREVENTIVE MAINTENANCE | 45 |
| MACHINE SIGN TRANSLATIONS | 57 |
| SPECIFICATIONS | 63 |
| WARRANTY | 67 |
| INSTALLATION INSTRUCTIONS | 1 |
| ALPHABETICAL INDEX | 85 |

REFERENCE INFORMATION

Write the correct information for YOUR Bobcat attachment in the spaces below. Always use these numbers when referring to your Bobcat attachment.

Attachment Serial Number _____

NOTES:

YOUR BOBCAT DEALER:

ADDRESS:

PHONE:

Bobcat Company
P.O. Box 128
Gwinner, ND 58040-0128
UNITED STATES OF AMERICA

Doosan Benelux SA
Drève Richelle 167
B-1410 Waterloo
BELGIUM



Thank you very much
for your reading.
Please click here
to get more information.