

TRATTORI KUBOTA

B1200 – B1400

B1500 – B1600

B1702 - B1902

MANUALE  [DOWNLOAD](#)  MANUTENZIONE

IMPLEMENT LIMITATIONS

The KUBOTA Tractor has been thoroughly tested for proper performance with implements sold or approved by KUBOTA. Use with implements which exceed the maximum specifications listed below, or which are otherwise unfit for use with the KUBOTA Tractor may result in malfunctions or failures of the tractor, damage to other property and injury to the operator or others. [Any malfunctions or failures of the tractor resulting from use with improper implements are not covered by the warranty.]

	Tread (max. width) with farm tires		Lower link end max. loading weight W_0
	Front	Rear	
B1410 · B1610	858mm	1031mm	300kg


	Actual figures		
	Implement weight W_1 and/or size	Max. Drawbar Load W_2	Trailer loading weight W_3 Max. capacity
B1410 · B1610	As in the following list (Shown on the next page)	330kg	1000kg

Lower link end max. loading weight The max. allowable load which can be put on the lower link end: W_0

Implement weight The implement's weight which can be put on the lower link: W_1

Max. drawbar load W_2

Trailer loading weight The max. loading weight for trailer (with trailer's weight): W_3

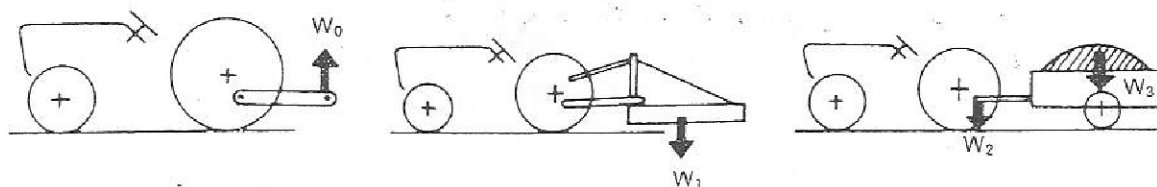

NOTE:

- Implement size may vary depending on soil operating conditions.



Thank you very much
for your reading.
Please click here
to get more information.