





Bobcat®

EN

Operation & Maintenance Manual Forestry Cutter

(FRC150HT) S/N B4A800101 & Above
(FRC200HT) S/N B48J00101 & Above

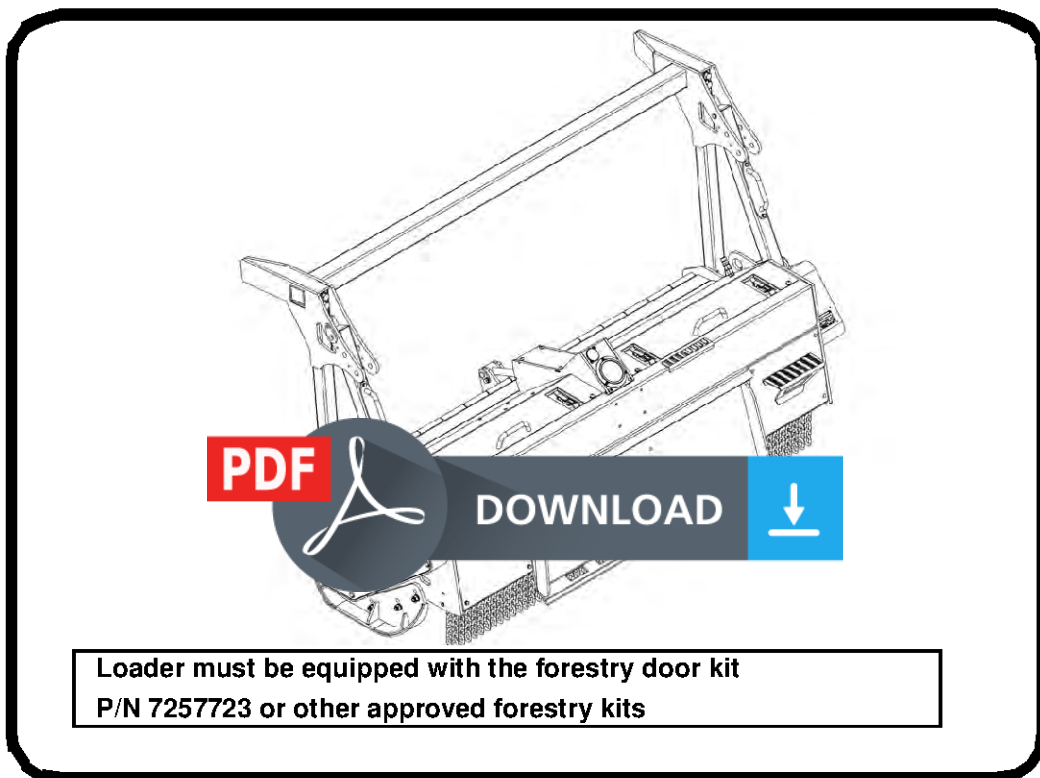

OPERATOR SAFETY WARNINGS




WARNING

Operator must have instructions before operating the machine. Untrained operators can cause injury or death.


W-2001-0502




Safety Alert Symbol: This symbol with a warning statement, means: "Warning, be alert! Your safety is involved!" Carefully read the message that follows.

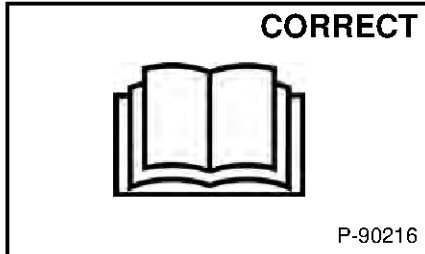


- ⚠ Never use the forestry cutter without instructions. See machine signs (decals), Operation & Maintenance Manual, Operator's Handbook and Maintenance Training Video.

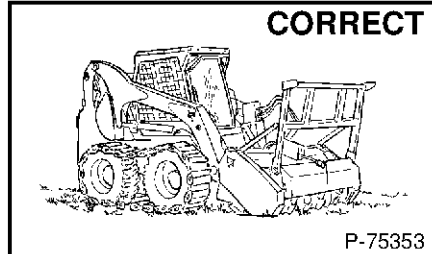


- ⚠ When servicing the forestry cutter always fully lower the lift arms, place the forestry cutter flat on the ground, engage the parking brake and stop the engine.

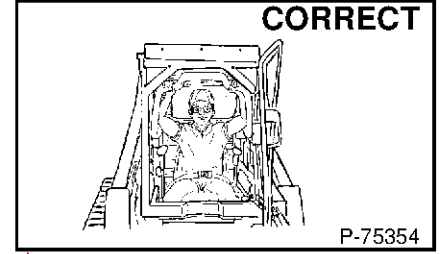


- ⚠ Always use the seat bar and fasten seat belt snugly.
- ⚠ Always keep feet on the pedals when operating loader.

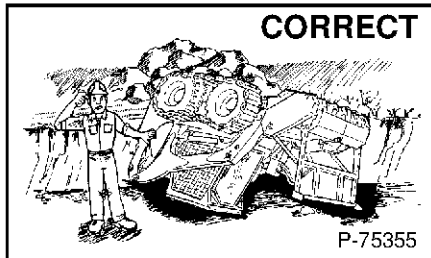


- ⚠ Always check work area before operating forestry cutter.
- ⚠ Never use loader without operator cab with ROPS and FOPS approval. Fasten your seat belt.

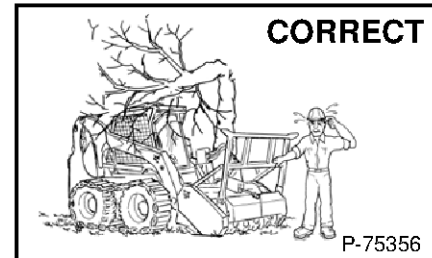


- ⚠ Do Not operate forestry cutter without a Level II FOPS kit installed on the cab of the loader.
- ⚠ Do Not operate without forestry door installed.

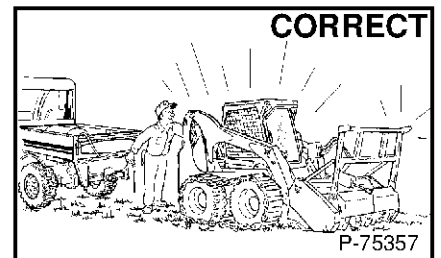


- ⚠ Flammable debris, can cause a fire hazard. Inspect the loader and forestry cutter and clean as necessary to avoid debris accumulation.

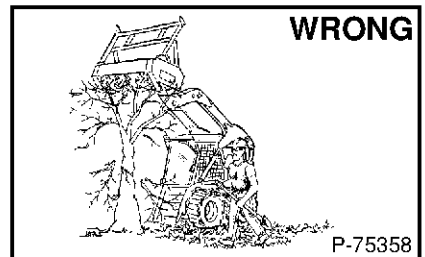

- ⚠ Keep bystanders away when operating forestry cutter.
- ⚠ Never allow riders on forestry cutter.

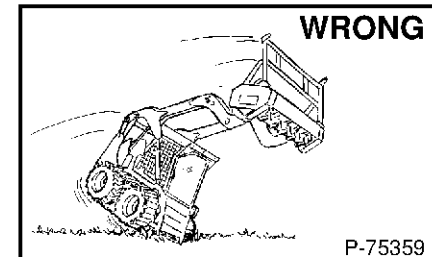

- ⚠ Always carry attachment as low as possible.
- ⚠ Do not travel or turn with lift arms up.

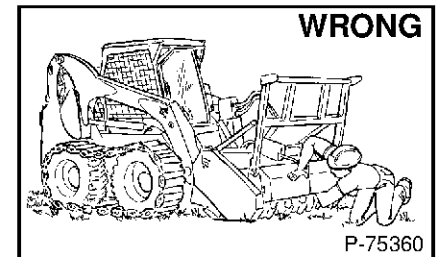

- ⚠ Do not put hands, feet, or objects under forestry cutter when engine is running.
- ⚠ To park, engage parking brake and put attachment flat on the ground and stop engine.

SAFETY EQUIPMENT

The Bobcat Loader and Forestry Cutter Attachment must be equipped with safety items necessary for each job. Ask your dealer about attachments and accessories.

1. SEAT BELT: Check belt fasteners and check for damaged webbing or buckle.
2. SEAT BAR: When up, it must lock the loader controls.
3. OPERATOR CAB (ROPS and FOPS): Must have Level II FOPS kit for use with Forestry Cutter attachment. Keep all fasteners tight.
4. OPERATOR'S HANDBOOK: Must be in the cab.
5. MACHINE AND ATTACHMENT SAFETY SIGNS (DECALS): Replace if damaged.
6. FORESTRY APPLICATIONS KIT: Required for additional operator and machine protection when using the Forestry Cutter attachment. Available from your dealer.
7. FORESTRY DOOR: Check for proper function of Interlock and Emergency Exit.
8. PARKING BRAKE:
9. GRAB HANDLES & SAFETY TREADS: Replace if damaged.
10. DEBRIS CHAINS: Replace if damaged.
11. FORESTRY CUTTER HYDRAULIC BRAKE: Check for proper function.

OSW54-0409



Bobcat®

CONTENTS

FOREWORD	3
SAFETY AND TRAINING RESOURCES	13
OPERATING INSTRUCTIONS	29
PREVENTIVE MAINTENANCE	85
SPECIFICATIONS	95
WARRANTY	99
ALPHABETICAL INDEX	103

REFERENCE INFORMATION

Write the correct information for YOUR Bobcat loader in the spaces below. Always use these numbers when referring to your Bobcat loader.

Loader Serial Number _____
Engine Serial Number _____

NOTES:

YOUR BOBCAT DEALER:

ADDRESS:

PHONE:



Bobcat Company
P.O. Box 128
Gwinner, ND 58040-0128
UNITED STATES OF AMERICA

Doosan Bobcat Manufacturing s.r.o.
U Kodetky 1978
26312 Dobris
CZECH REPUBLIC



Thank you very much
for your reading.
Please click here
to get more information.