




Service Manual

741 (S/N 501720001 & Above), 742 (S/N 501820001 – 501822999), 743 (S/N 501920001 & Above) & 743DS (S/N 502551001 & Above)

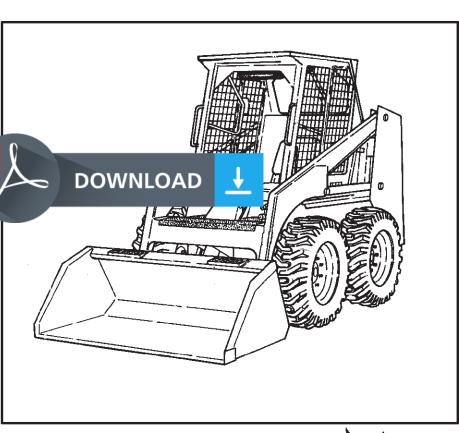

MELROE INGERSOLL-RAND

PDF

bobcat

© Melroe Company 1997

MAINTENANCE SAFETY


WARNING

Instructions are necessary before operating or servicing machine. Read and understand the Operation & Maintenance Manual, Operator's Handbook and signs (decals) on machine. Follow warnings and instructions in the manuals when making repairs, adjustments or servicing. Check for correct function after adjustments, repairs or service. Untrained operators and failure to follow instructions can cause injury or death.


W-2003-0903

A

Safety Alert Symbol: This symbol with a warning statement, means: "Warning, be alert! Your safety is involved!" Carefully read the message that follows.



Never service the Bobcat Skid-Steer Loader without instructions.



A Have good ventilation when welding or grinding painted parts.

Wear dust mask when grinding painted parts. Toxic dust and gas can be produced.

Avoid exhaust fume leaks which can kill without warning. Exhaust system must be tightly sealed.




A Stop, cool and clean engine of flammable materials before checking fluids.


Never service or adjust loader with the engine running unless instructed to do so in the manual.

Avoid contact with leaking hydraulic fluid or diesel fuel under pressure. It can penetrate the skin or eyes.


Never fill fuel tank with engine running, while smoking or when near open flame.



Use the correct procedure to lift or lower operator cab.



Disconnecting or loosening any hydraulic tubeline, hose, fitting, component or a part failure can cause lift arms to drop. Do not go under lift arms when raised unless supported by an approved lift arm support device. Replace it if damaged.




Keep body, jewelry and clothing away from moving parts, electrical contact, hot parts and exhaust.

Mear eye protection to guard from battery acid, compressed springs, fluids under pressure and flying debris when engines are running or tools are used. Use eye protection approved for type of welding.

Keep rear door closed except for service. Close and latch door before operating the loader.



Cleaning and maintenance are required daily.



Never work on loader with lift arms up unless lift arms are held by an approved lift arm support device. Replace if damaged.

Never modify equipment or add attachments not approved by Bobcat Company.



Lead-acid batteries produce flammable and explosive gases.

Keep arcs, sparks, flames and

Keep arcs, sparks, flames and lighted tobacco away from batteries.

Batteries contain acid which burns eyes or skin on contact. Wear protective clothing. If acid contacts body, flush well with water. For eye contact flush well and get immediate medical attention.

Maintenance procedures which are given in the Operation & Maintenance Manual can be performed by the owner/operator without any specific technical training. Maintenance procedures which are **not** in the Operation & Maintenance Manual must be performed **ONLY BY QUALIFIED BOBCAT SERVICE PERSONNEL. Always use genuine Bobcat replacement parts.** The Service Safety Training Course is available from your Bobcat dealer.

MSW01-0805



CONTENTS

DREWORD	i
AFETY INSTRUCTIONS	
ERIAL NUMBER LOCATIONS i	V
ELIVERY REPORT	V
DBCAT LOADER IDENTIFICATION	
REVENTIVE MAINTENANCE1-	1
/DRAULIC	1
/DROSTATIC	
RIVE SYSTEM 4-	1
AIN FRAME5–	1
.ECTRICAL SYSTEM 6-	1
IGINE SERVICE	1
PECIFICATIONS	1

PREVENTIVE MAINTENANCE

HYDRAULIC SYSTEM

HYDROSTATIC SYSTEM

DRIVE SYSTEM

ELECTRICAL SYSTEM

ENGINE SERVICE

ENGINE SERVICE

SPECIFICATIONS

CALIFORNIA PROPOSITION 65 WARNING Diesel engine exhaust and some of its

constituents are known to the State of California to cause cancer, birth defects and other reproductive harm.



Thank you very much for your reading.

Please click here to get more information.